

Octopus



“B” Series

Octopus Models:
1825B, 1835B, 1845B, 2325B

Standard configuration listed below.
Please contact your sales representative for additional options.

Structure

Aluminum frame

Performance

Speed: 25-45 rpm
Loads Per Hour: Up to 100 loads per hour depending on load size and wrap pattern
Maximum Load Size: 1200 mm W x 1400 mm L (1825B, 1835B, 1845B)
 1700 mm W x 1500 mm L (2325B)
 Note: Maximum load size depends on the width and length combination.
 Please contact us for more information.
Maximum Load Weight: Dependent on conveyor

Shipping Information

Dimensions: 2470 mm W x 3900 mm L x 2860 mm H (1825B)
 2470 mm W x 3400 mm L x 2900mm H (1835B, 1845B)
 2990 mm W x 4000 mm L x 2900 mm H (2325B)

Machine Weight: 1450 kg (1825B)
 1550 kg (1835B, 1845B)
 1700 kg (2325B)

Film Delivery System


Film Capacity: 500 mm W x 250 mm Dia.
Film Tension: Tacho Feedback
Tension Control: Variable pre-programmed tension levels
Film Threading: *easy S film carriage*
Cut & Seal: No Touch-No Tail (NT²) seamer

Air & Power Requirements

Power: 3 x 380 VAC / 50 Hz
 3 x 400 VAC / 50 Hz
 3 x 415 VAC / 50 Hz
Pneumatics: 0.6 MPa, max 9 l/cycle

Optional Equipment

Integrated top sheet dispenser
 Roping device
 Load stabilizer
 Tail tucker / LogoWrap™
 Conveyors
 Corner Post Device (CPD)
 Pallet lift device
 OctoMAX™
 Safety fence
 And many more . . .

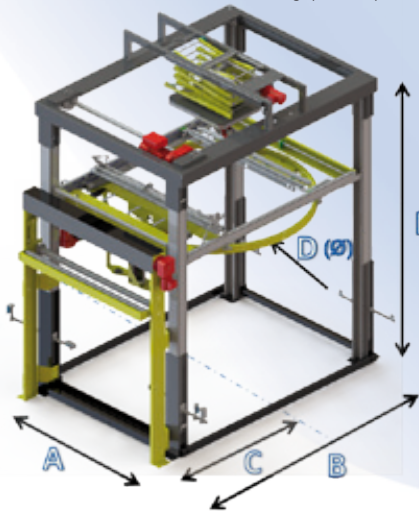

Machine Dimensions

MODEL	B	D	C	A	H
1825B, 1835B, 1845B	3150 mm	2470 mm	1720 mm	2380 mm	*
2325B	3650 mm	2990 mm	2000 mm	2880 mm	*

* Depends on the pallet and conveyor height.